




2 KOMPONENTEN MASCHINENBAU MIX- AND METERING SYSTEMS




SilcoStar 902A and 922A

Hydraulic driven Metering system for processing LSR



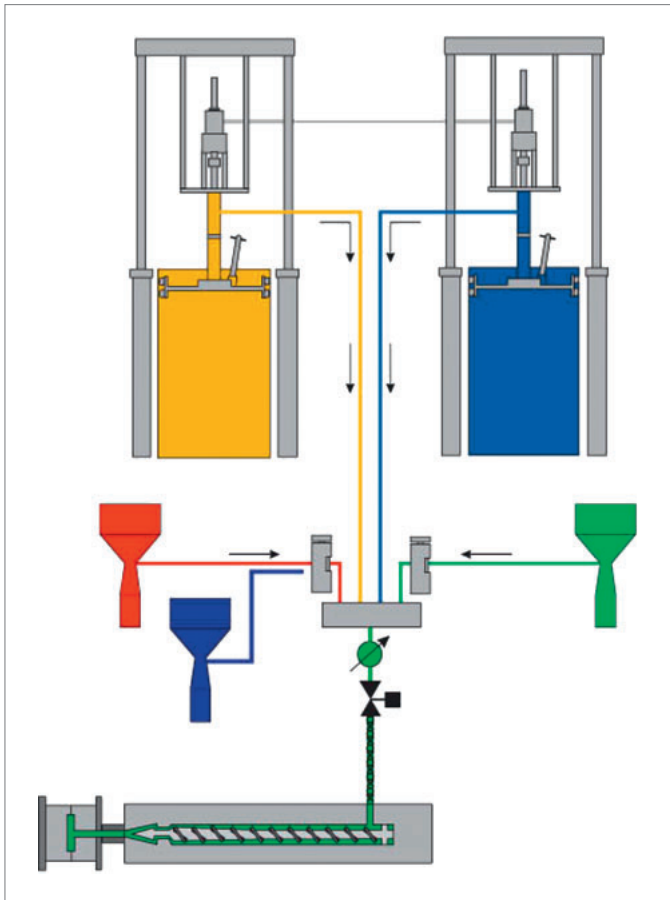


Proportional colour metering

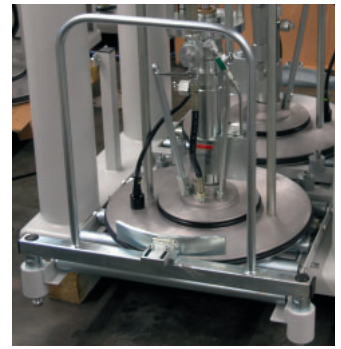

Roll-in-device



Movable version

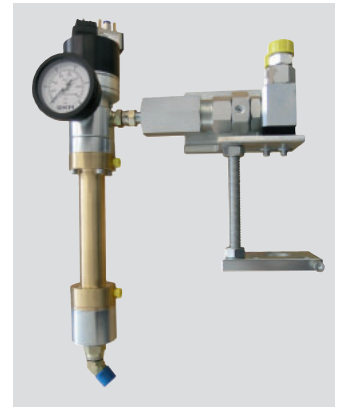

Cooled mixing unit



Follower plate for 20l / 200l barrels

Options

- Colour- metering
- Proportional colour metering
- Cooled mixing unit
- Interchanging supply of two LIM machines
- Roll- In device for an easy change of barrel
- Movable version (on wheels)
- Varnishing in special colours

Technical Data

	902A (20l pail) /
	922A (200l + 20l barrel/pail)
Viscosity	600.000 mPas / 1.000.000 mPas
Output mixed material	800g/min (depending on viscosity) / 800g/min
Mixing Ratio	1:1
Colour Metering	0,3 – 4%

Consumption / Connections

Actuation	hydraulic
Electrical Data	175 – 275VAC / 300 – 480VAC, max. 10A
Connection	
LIM Machine	24V-
Pneumatic System	R1/4", 6bar, low
Weight	appr. 480kg / appr. 800kg
Dimensions	1.100x700x2.000 mm [WxHxD]/ 1.000x1.905x1.490) mm [WxHxD]